

IEC Squirrel-Cage Motors

Frame sizes 56 to 450

Power range 0.06 to 1250 kW

Catalog D 81.1 • 2008



Motors

SIEMENS

IEC Squirrel-Cage Motors

Introduction motors 1LA, 1LG, 1LL, 1LP, 1MA, 1MJ, 1PP, 1PQ

General technical data

Rated currents for rated voltage range 380 V to 420 V at 50 Hz

	Currents for voltage and number of poles							
	380 V 2-pole A	420 V A	380 V 4-pole A	420 V A	380 V 6-pole A	420 V A	380 V 8-pole A	420 V A
1LA7, 1LA5 motors								
1LA7 050	0.27	0.26	0.21	0.21	–	–	–	–
1LA7 053	0.33	0.32	0.30	0.31	–	–	–	–
1LA7 060	0.52	0.53	0.42	0.44	–	–	–	–
1LA7 063	0.69	0.71	0.58	0.59	0.48	0.5	–	–
1LA7 070	1.05	1.02	0.80	0.77	0.66	0.64	0.36	0.36
1LA7 073	1.38	1.41	1.07	1.06	0.80	0.80	0.51	0.52
1LA7 080	1.75	1.79	1.50	1.50	1.18	1.25	0.73	0.80
1LA7 083	2.45	2.50	2.12	2.17	1.62	1.66	1.01	1.10
1LA7 090	3.40	3.35	2.60	2.60	2.10	2.15	1.15	1.18
1LA7 096	4.70	4.65	3.50	3.50	3.0	2.95	1.63	1.60
1LA7 106	6.25	6.15	4.8	4.8	4.0	4.1	2.25	2.2
1LA7 107	–	–	6.5	6.8	–	–	3.0	3.0
1LA7 113	8.2	7.7	8.4	8.3	5.4	5.3	4.1	4.2
1LA7 130	10.6	10.4	11.4	11.9	7.3	7.5	5.9	6.0
1LA7 131	14.1	13.8	–	–	–	–	–	–
1LA7 133	–	–	15.4	15.5	9.5	9.7	7.9	7.9
1LA7 134	–	–	–	–	13.0	13.1	–	–
1LA7 163	21.0	20.5	22.3	21.5	17.5	17.3	9.9	10.6
1LA7 164	28.0	26.0	–	–	–	–	13.1	13.4
1LA7 166	34.0	32.0	29.5	28.5	24.8	24.7	17.6	18.4
1LA5 183	40	38	36	35	–	–	–	–
1LA5 186	–	–	42	41	32.7	31	26.5	23.5
1LA5 206	55	52	–	–	40	38.5	–	–
1LA5 207	67	64	57	54	46.5	45.5	34	31
1LA5 220	–	–	69	64	–	–	40	37
1LA5 223	81	76	84	78	64	63	47	43
1LA6, 1LG4 motors								
1LA6 106	6.25	6.15	4.8	4.8	4.0	4.1	2.25	2.2
1LA6 107	–	–	6.5	6.8	–	–	3.0	3.0
1LA6 113	8.2	7.7	8.4	8.3	5.4	5.3	4.1	4.2
1LA6 130	10.6	10.4	11.4	11.9	7.3	7.5	5.9	6.0
1LA6 131	14.1	13.8	–	–	–	–	–	–
1LA6 133	–	–	15.4	15.5	9.5	9.7	7.9	7.9
1LA6 134	–	–	–	–	13.0	13.1	–	–
1LA6 163	21.0	20.5	22.3	21.5	17.5	17.3	9.9	10.6
1LA6 164	28.0	26.0	–	–	–	–	13.1	13.4
1LA6 166	34.0	32.0	29.5	28.5	24.8	24.7	17.6	18.4
1LG4 183	41.5	40	36	35	–	–	–	–
1LG4 186	–	–	42.5	41.5	30.5	28.5	25.5	25
1LG4 188	56	54	59	60	38.5	37	34.5	34.5
1LG4 206	56	52	–	–	37	37	–	–
1LG4 207	67	63	57	55	45	42.5	33.5	32
1LG4 208	82	77	70	69	61	60	40.5	39
1LG4 220	–	–	72	65	–	–	40.5	36.5
1LG4 223	83	75	85	77	60	54	46.5	42
1LG4 228	100	90	104	94	73	66	64	58
1LG4 253	100	93	104	98	73	68	60	57
1LG4 258	134	128	138	134	87	81	73	69
1LG4 280	136	126	144	132	87	80	76	70
1LG4 283	162	150	168	156	106	97	92	84
1LG4 288	196	182	204	190	146	134	112	102
1LG4 310	198	188	205	194	142	136	110	104
1LG4 313	230	215	245	230	170	162	146	136
1LG4 316	280	255	295	275	205	190	174	164
1LG4 317	345	315	360	330	245	225	210	198
1LG4 318	–	–	–	–	295	275	250	240

IEC Squirrel-Cage Motors

Introduction motors 1LA, 1LG, 1LL, 1LP, 1MA, 1MJ, 1PP, 1PQ

General technical data

	Currents for voltage and number of poles							
	380 V 2-pole A	420 V A	380 V 4-pole A	420 V A	380 V 6-pole A	420 V A	380 V 8-pole A	420 V A
1LG6, 1LA8 motors								
1LG6 183	40.5	37.5	36	34.5	–	–	–	–
1LG6 186	–	–	42.5	40.5	30.5	29	24.5	23
1LG6 206	54	51	–	–	37	35.5	–	–
1LG6 207	66	62	56	54	44	40.5	32.5	30.5
1LG6 220	–	–	70	64	–	–	38	34.5
1LG6 223	81	73	84	76	59	53	45	41
1LG6 253	97	90	99	94	72	67	59	55
1LG6 280	134	124	138	128	85	79	75	69
1LG6 283	158	146	166	154	104	96	91	83
1LG6 310	192	174	200	184	142	134	106	100
1LG6 313	230	210	235	215	166	156	142	136
1LG6 316	275	250	285	265	205	190	170	158
1LG6 317	340	305	355	330	245	225	205	194
1LG6 318	–	–	–	–	290	275	250	230
1LA8 315	435	400	450	425	360	340	310	295
1LA8 317	540	495	560	530	450	420	385	365
1LA8 353	620	570	640	590	–	–	–	–
1LA8 355	690	630	720	680	570	530	480	455
1LA8 357	860	790	880	820	720	670	600	560
1LA8 403	950	880	990	930	810	760	680	640
1LA8 405	1080	990	1100	1040	890	840	760	720
1LA8 407	690 ¹⁾	640 ²⁾	710 ¹⁾	670 ²⁾	1000	940	850	810
1LA8 453	780 ¹⁾	730 ²⁾	810 ¹⁾	750 ²⁾	1160	1060	960	910
1LA8 455	880 ¹⁾	810 ²⁾	910 ¹⁾	860 ²⁾	740 ¹⁾	690 ²⁾	1080	1020
1LA8 457	970 ¹⁾	890 ²⁾	1000 ¹⁾	940 ²⁾	830 ¹⁾	770 ²⁾	1200	1140

The rating plates of 1MJ6 motors specify the maximum current in the voltage range in addition to the rated current. This maximum is approximately 5 % higher than the rated current.

¹⁾ Only available for 690 V, see catalog part 3 "Non-standard motors frame size 315 and above"; but in 660 V design.

²⁾ Only available for 690 V, see catalog part 3 "Non-standard motors frame size 315 and above"; but in 725 V design.

IEC Squirrel-Cage Motors

Introduction motors 1LA, 1LG, 1LL, 1LP, 1MA, 1MJ, 1PP, 1PQ

General technical data

0

Outputs

The outputs and the rated outputs are listed in the selection tables and in the separate catalog parts for 50 Hz and in most

Table of rated output at 60 Hz for single-speed motors

Motor type			Admissible output at 60 Hz for voltages between 220 V or 380 V and 725 V			
			2-pole kW	4-pole kW	6-pole kW	8-pole kW
1LA6, 1LG4, 1LG6, 1LA7, 1MJ6, 1MJ7 motors						
1LA7 050	–	–	0.105	0.07	–	–
1LA7 053	–	–	0.14	0.105	–	–
1LA7 060	–	–	0.21	0.14	–	–
1LA7 063	–	–	0.29	0.21	0.1	–
1LA7 070	–	1MJ6 070	0.43	0.29	0.21	0.1
1LA7 073	–	1MJ6 073	0.63	0.43	0.29	0.14
1LA7 080	–	1MJ6 080	0.86	0.63	0.43	0.21
1LA7 083	–	1MJ6 083	1.3	0.86	0.63	0.29
1LA7 090	–	1MJ6 096	1.75	1.3	0.86	0.43
1LA7 096	–	1MJ6 097	2.55	1.75	1.3	0.63
1LA7 106	1LA6 106	1MJ6 106	3.45	2.55	1.75	0.86
1LA7 107	1LA6 107	1MJ6 107	–	3.45	–	1.3
1LA7 113	1LA6 113	1MJ6 113	4.6	4.6	2.55	1.75
1LA7 130	1LA6 130	1MJ6 130	6.3	6.3	3.45	2.55
1LA7 131	1LA6 131	1MJ6 131	8.6	–	–	–
1LA7 133	1LA6 133	1MJ6 133	–	8.6	4.6	3.45
1LA7 134	1LA6 134	1MJ6 134	–	–	6.3	–
1LA7 163	1LA6 163	1MJ6 163	12.6	12.6	8.6	4.6
1LA7 164	1LA6 164	1MJ6 164	17.3	–	–	6.3
1LA7 166	1LA6 166	1MJ6 166	21.3	17.3	12.6	8.6
1LA5 183	1LG . 183	1MJ6 183	24.5	21.3	–	–
1LA5 186	1LG . 186	1MJ6 186	–	25.3	18	3.2
–	1LG . 188	–	33.5	34.5	22	18
1LA5 206	1LG . 206	1MJ6 206	33.5	–	22	–
1LA5 207	1LG . 207	1MJ6 207	41.5	34.5	26.5	18
–	1LG . 208	–	51	42.5	36	22
1LA5 220	1LG . 220	1MJ7 220	–	42.5	–	22
1LA5 223	1LG . 223	1MJ7 223	51	52	36	26.5
–	1LG . 228	–	62	63	44.5	36
–	1LG . 253	1MJ7 253	62	63	44.5	36
–	1LG . 258	–	84	86	54	44.5
–	1LG . 280	1MJ7 280	84	86	54	44.5
–	1LG . 283	1MJ7 283	101	104	66	54
–	1LG . 288	–	123	127	90	66
–	1LG . 310	1MJ7 310	123	127	90	66
–	1LG . 313	1MJ7 313	148	152	108	90
–	1LG . 316	–	180	184	132	108
–	1LG . 317	–	224	230	158	132
–	1LG . 318	–	–	–	192	158

Table of rated output at 60 Hz for pole-changing motors

At 60 Hz, the output can be increased in accordance with the factors listed in the table below. The output is increased separately for each number of poles, i.e. for 6/4-pole motors, frame sizes 180 to 315, 60 Hz, the 6-pole output can be increased by 20 % and the 4-pole output can be increased by 15 %.

Possible versions of 2-pole motors

Frame size	Horizontal type of construction				Vertical type of construction	60 Hz
	50 Hz with foot	60 Hz with foot	50 Hz with flange	60 Hz with flange	50 Hz	
56 to 315 M	•	•	•	•	•	•
315 L	•	•	–	–	•	•
315	•	•	•	•	•	•
355 and 400	•	•	•	•	•	–
450	•	–	•	–	•	–

cases also for 60 Hz. For 60 Hz, the rated output values must, in some cases, be increased, e.g. for pole-changing motors.

Motor type			Admissible output at 60 Hz for voltages between 380 V and 725 V			
			2-pole kW	4-pole kW	6-pole kW	8-pole kW
1LA8 motors						
1LA8 315	–	–	280	288	230	184
1LA8 317	–	–	353	362	288	230
1LA8 353	–	–	398	408	–	–
1LA8 355	–	–	448	460	362	288
1LA8 357	–	–	560	575	460	362
1LA8 403	–	–	616	644	518	408
1LA8 405	–	–	693	725	575	460
1LA8 407	–	–	–	817	644	518
1LA8 453	–	–	–	–	725	575
1LA8 455	–	–	–	–	–	644
1LA8 457	–	–	–	–	–	725

The speed increases to approx. 120 % in relation to 50 Hz motors.

Higher outputs/voltages are available on request!

Frame size	Number of poles	Factor for increased output at 60 Hz for voltages between 220 or 380 and 725 V
56 to 160	2 to 8	1.15
180 to 315	2	1.12
	4	1.15
	6 and 8	1.2


IEC Squirrel-Cage Motors

Standard motors frame size 315L and above

Dimensions

Overview

Overall dimensions

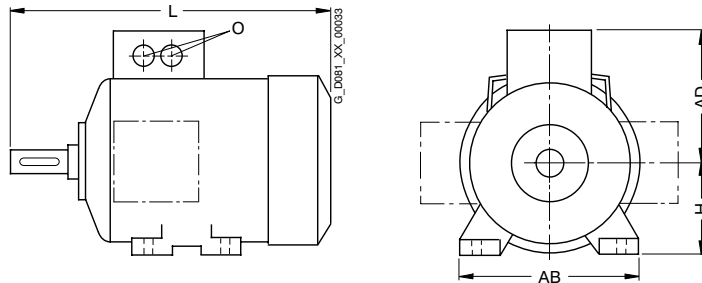

Frame size	Type	Number of poles	Dimensions L	AD	H	AB	O
56 M	1LA7		169	101	56	110	1 x M16 x 1.5
							1 x M25 x 1.5
	1LA9 050		169	101	56	110	1 x M16 x 1.5
							1 x M25 x 1.5
	1LA9 053		195	101	56	110	1 x M16 x 1.5
							1 x M25 x 1.5
63 M	1LA7		202.5	101	63	120	1 x M16 x 1.5
							1 x M25 x 1.5
	1LA9 063		202.5	101	63	120	1 x M16 x 1.5
							1 x M25 x 1.5
	1LA9 061		228.5	101	63	120	1 x M16 x 1.5
							1 x M25 x 1.5
71 M	1LA7		240	111	71	132	1 x M16 x 1.5
							1 x M25 x 1.5
	1LA9		240	111	71	132	1 x M16 x 1.5
							1 x M25 x 1.5
	1LP7		207	111	71	132	1 x M16 x 1.5
							1 x M25 x 1.5
80 M	1LA7		273.5	120	80	150	1 x M16 x 1.5
							1 x M25 x 1.5
	1LA9 080		273.5	120	80	150	1 x M16 x 1.5
							1 x M25 x 1.5
	1LA9 083		308.5	120	80	150	1 x M16 x 1.5
							1 x M25 x 1.5
	1LP7		237	120	80	150	1 x M16 x 1.5
							1 x M25 x 1.5
90 S/ 90 L	1LA7		331	128	90	165	1 x M16 x 1.5
							1 x M25 x 1.5
	1LA9		331	128	90	165	1 x M16 x 1.5
							1 x M25 x 1.5
	1LA9 096-6K.		376	128	90	165	1 x M16 x 1.5
							1 x M25 x 1.5
	1LA9 096-2..		358	128	90	165	1 x M16 x 1.5
							1 x M25 x 1.5
	1LA9 096-4..		358	128	90	165	1 x M16 x 1.5
							1 x M25 x 1.5
	1LP7		286	128	90	165	1 x M16 x 1.5
							1 x M25 x 1.5
100 L	1LA6		372	164	100	196	2 x M32 x 1.5
	1LA7		372	135	100	196	2 x M32 x 1.5
	1LA9		407	135	100	196	2 x M32 x 1.5
	1LA9 107-4KA.		442	135	100	196	2 x M32 x 1.5
	1LP7		331	135	100	196	2 x M32 x 1.5
112 M	1LA6		393	178	112	226	2 x M32 x 1.5
	1LA7		393	148	112	226	2 x M32 x 1.5
	1LA9		431	148	112	226	2 x M32 x 1.5
	1LP7		349	148	112	226	2 x M32 x 1.5
132 S/ 132 M	1LA6		453	194	132	256	2 x M32 x 1.5
	1LA7		452.5	167	132	256	2 x M32 x 1.5
	1LA9		452.5	167	132	256	2 x M32 x 1.5
	1LA9 131		490.5	167	132	256	2 x M32 x 1.5
	1LA9 133		490.5	167	132	256	2 x M32 x 1.5
	1LA9 134		490.5	167	132	256	2 x M32 x 1.5
	1LP7		397	167	132	256	2 x M32 x 1.5

Frame size	Type	Number of poles	Dimensions L	AD	H	AB	O
160 M/ 160 L	1LA6		588	226	160	300	2 x M40 x 1.5
	1LA7		588	197	160	300	2 x M40 x 1.5
	1LA9		588	197	160	300	2 x M40 x 1.5
	1LA9 166		628	197	160	300	2 x M40 x 1.5
	1LP7		529	197	160	300	2 x M40 x 1.5
180 M/ 180 L	1LA5		712	258	180	339	2 x M40 x 1.5
	1LA9		712	258	180	339	2 x M40 x 1.5
	1LG4		669	262	180	339	2 x M40 x 1.5
	1LG4 188		720	262	180	339	2 x M40 x 1.5
	1LG6 183	2	720	262	180	339	2 x M40 x 1.5
	1LG6 183	4	669	262	180	339	2 x M40 x 1.5
	1LG6 186	4, 6, 8	720	262	180	339	2 x M40 x 1.5
	1LP4 183	2, 4	562	262	180	339	2 x M40 x 1.5
	1LP4 186	4, 6, 8	562	262	180	339	2 x M40 x 1.5
	1LP5		611	258	180	339	2 x M40 x 1.5
200 L	1LA5		769.5	305	200	388	2 x M50 x 1.5
	1LA9		768.5	305	200	388	2 x M50 x 1.5
	1LG4		720	300	200	378	2 x M50 x 1.5
	1LG4 208	2, 6	777	300	200	378	2 x M50 x 1.5
	1LG6 206		720	300	200	378	2 x M50 x 1.5
	1LG6 207	2, 6	777	300	200	378	2 x M50 x 1.5
	1LG6 207	4, 8	720	300	200	378	2 x M50 x 1.5
	1LP4 206	2, 6	617	300	200	378	2 x M50 x 1.5
	1LP4 207	2, 4, 6, 8	617	300	200	378	2 x M50 x 1.5
	1LP5		675	305	200	388	2 x M50 x 1.5
225 S/ 225 M	1LA5		806	305	225	426	2 x M50 x 1.5
	1LA5	2	776	305	225	426	2 x M50 x 1.5
	1LG4		789	325	225	436	2 x M50 x 1.5
	1LG4 223	2	759	325	225	436	2 x M50 x 1.5
	1LG4 228	2	819	325	225	436	2 x M50 x 1.5
	1LG4 228	4, 6, 8	849	325	225	436	2 x M50 x 1.5
	1LG6 220	4, 8	789	325	225	436	2 x M50 x 1.5
	1LG6 223	2	819	325	225	436	2 x M50 x 1.5
	1LG6 223	4, 6, 8	849	325	225	436	2 x M50 x 1.5
	1LG6 228	2	869	325	225	436	2 x M50 x 1.5
	1LG6 228	4, 6	899	325	225	436	2 x M50 x 1.5
	1LP4 220	4, 8	670	325	225	436	2 x M50 x 1.5
250 M	1LP4 223	2	640	325	225	436	2 x M50 x 1.5
	1LP4 223	4, 6, 8	670	325	225	436	2 x M50 x 1.5
	1LG4		887	392	250	490	2 x M63 x 1.5
	1LG4 258	4	957	392	250	490	2 x M63 x 1.5
	1LG6 253	2, 6, 8	887	392	250	490	2 x M63 x 1.5
	1LG6 253	4	957	392	250	490	2 x M63 x 1.5
	1LG6 258	2, 4, 6	957	392	250	490	2 x M63 x 1.5
	1LP4 253	2	764	392	250	490	2 x M63 x 1.5
	1LP4 253	4, 6, 8	764	392	250	490	2 x M63 x 1.5

IEC Squirrel-Cage Motors

Standard motors frame size 315L and above

Dimensions

Overview (continued)

Frame size	Type	Number of poles	Dimensions L	AD	H	AB	O
280 S/	1LG4		960	432	280	540	2 x M63 x 1.5
280 M	1LG4 288	2, 4	1070	432	280	540	2 x M63 x 1.5
	1LG6 280	2, 4, 6, 8	960	432	280	540	2 x M63 x 1.5
	1LG6 283	2, 4	1070	432	280	540	2 x M63 x 1.5
	1LG6 283	6, 8	960	432	280	540	2 x M63 x 1.5
	1LG6 288	2, 4, 6	1070	432	280	540	2 x M63 x 1.5
	1LP4 280	2, 4, 6, 8	830	432	280	540	2 x M63 x 1.5
	1LP4 283	2, 4, 6, 8	830	432	280	540	2 x M63 x 1.5
315 S/	1LG4		1072	500	315	610	2 x M63 x 1.5
315 M/	1LG4 310	4, 6, 8	1102	500	315	610	2 x M63 x 1.5
315 L	1LG4 313	4, 6, 8	1102	500	315	610	2 x M63 x 1.5
	1LG4 316	2	1232	500	315	610	2 x M63 x 1.5
	1LG4 316	4, 6, 8	1262	500	315	610	2 x M63 x 1.5
	1LG4 317	2	1232	500	315	610	2 x M63 x 1.5
	1LG4 317	4, 6, 8	1262	500	315	610	2 x M63 x 1.5
	1LG4 318	8	1262	500	315	610	2 x M63 x 1.5
	1LG4 318	6	1402	500	315	610	2 x M63 x 1.5

Frame size	Type	Number of poles	Dimensions L	AD	H	AB	O
315 S/	1LG6 310	2	1072	500	315	610	2 x M63 x 1.5
315 M/	1LG6 310	4, 6, 8	1102	500	315	610	2 x M63 x 1.5
315 L	1LG6 313	2	1232	500	315	610	2 x M63 x 1.5
	1LG6 313	4, 6	1262	500	315	610	2 x M63 x 1.5
	1LG6 313	8	1102	500	315	610	2 x M63 x 1.5
	1LG6 316	2	1232	500	315	610	2 x M63 x 1.5
	1LG6 316	4, 6, 8	1262	500	315	610	2 x M63 x 1.5
	1LG6 317	8	1262	500	315	610	2 x M63 x 1.5
	1LG6 317	2	1372	500	315	610	2 x M63 x 1.5
	1LG6 317	4, 6	1402	500	315	610	2 x M63 x 1.5
	1LG6 318	2	1372	651	315	610	2 x M63 x 1.5
	1LG6 318	4	1402	651	315	610	2 x M63 x 1.5
	1LG6 318	6, 8	1402	500	315	610	2 x M63 x 1.5
	1LP4 310	2	925	500	315	610	2 x M63 x 1.5
	1LP4 310	4, 6, 8	955	500	315	610	2 x M63 x 1.5
	1LP4 313	2	925	500	315	610	2 x M63 x 1.5
	1LP4 313	4, 6, 8	955	500	315	610	2 x M63 x 1.5
	1LP4 316	2	1085	500	315	610	2 x M63 x 1.5
	1LP4 316	4, 6, 8	1115	500	315	610	2 x M63 x 1.5
	1LP4 317	2	1085	500	315	610	2 x M63 x 1.5
	1LP4 317	4, 6, 8	1115	500	315	610	2 x M63 x 1.5

Notes on the dimensions

■ Dimension drawings according to DIN EN 50347 and IEC 60072.

■ Fits

The shaft extensions specified in the dimension tables (DIN 748) and centering spigot diameters (DIN EN 50347) are machined with the following fits:

Dimension designation	ISO fit DIN ISO 286-2	
D, DA	to 30	j6
	over 31 to 50	k6
	over 50	m6
N	to 250	j6
	over 250	h6
F, FA		h9
K		H17
S	flange (FF)	H17

The drilled holes of couplings and belt pulleys should have an ISO fit of at least H7.

■ Dimension tolerances

For the following dimensions, the admissible deviations are given below:

Dimension designation	Dimension	Permitted deviation
H	to 250	- 0.5
	over 250	- 1.0
E, EA		- 0.5

Keyways and feather keyways (dimensions GA, GC, F and FA) are made in compliance with DIN 6885 Part 1.


■ All dimensions are specified in mm.

More information

Dimension sheet generator

(part of the SD configurator)

A dimension drawing can be created in the SD configurator for every configurable motor. A dimension drawing can be requested for every other motor.

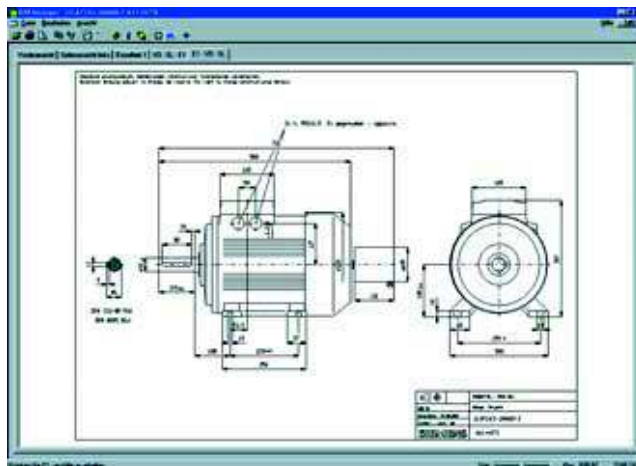

When a complete Order No. is entered with or without order codes, a dimension drawing can be called up under the "Documentation" tab.

These dimension drawings can be presented in different views and sections and printed.

The corresponding dimension sheets can be exported, saved and processed further in DXF format (interchange/import format for CAD systems) or as bitmap graphics.

The SD configurator has been integrated into the electronic Catalog CA 01 as a selection aid (for further information, catalog part 11 "Appendix", "SD configurator selection tool").

The interactive Catalog CA 01 can be ordered from your local Siemens sales representative or on the Internet at

<http://www.siemens.com/automation/CA01>

At this address, you will also find links to Tips & Tricks and to downloads for function or content updates.

Order number for CA 01 10/2008, English international:
DVD: E86060-D4001-A510-C7-7600

IEC Squirrel-Cage Motors

Standard motors up to frame size 315 L


Dimensions

Dimensional drawings

Aluminum series 1LA7 and 1LA5, frame sizes 56 M to 225 M

Type of construction IM B35


For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

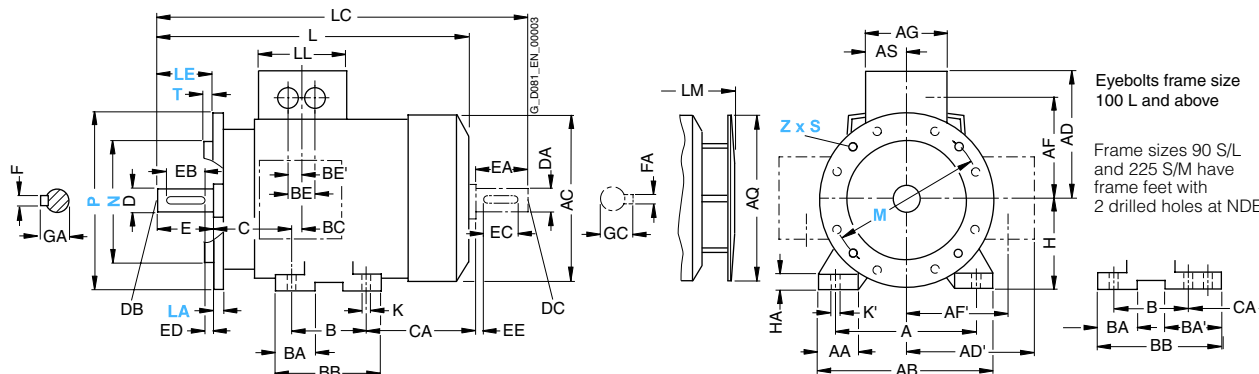

Type of construction IM B14

Type of construction IM B14 not possible for 1LA5 motors, frame sizes 180 M to 225 M

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

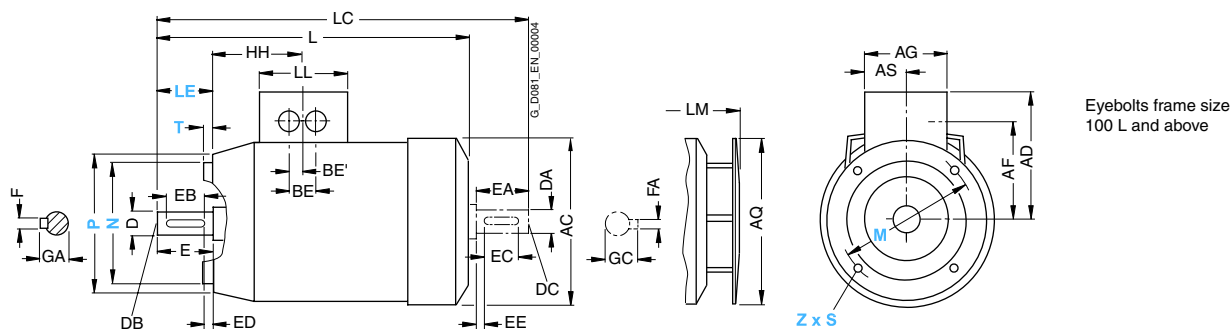

For motor			Dimension designation acc. to IEC							DE shaft extension				NDE shaft extension									
Frame size	Type	Number of poles	HH	K	K'	L	LC	LL	LM	D	DB	E	EB	ED	F	GA	DA	DC	EA	EC	EE	FA	GC
56 M ¹⁾	1LA7 050 1LA7 053	2, 4	69.5	5.8	9	169	200	75	—	9	M3	20	14	3	3	10.2	9	M3	20	14	3	3	10.2
63 M	1LA7 060 1LA7 063	2, 4, 6	69.5	7	10	202.5 ³⁾	232 ³⁾	75	231.5 ³⁾	11	M4	23	16	3.5	4	12.5	11	M4	23	16	3.5	4	12.5
71 M	1LA7 070 1LA7 073	2, 4, 6, 8	63.5	7	10	240	278	75	268	14	M5	30	22	4	5	16	14	M5	30	22	4	5	16
80 M	1LA7 080 1LA7 083	2, 4, 6, 8	63.5	9.5	13.5	273.5	324 364	75	299.5	19	M6	40	32	4	6	21.5	19	M6	40	32	4	6	21.5
90 S 90 L	1LA7 090 1LA7 096	2, 4, 6, 8	79	10	14	331	389	75	382.5	24	M8	50	40	5	8	27	19	M6	40	32	4	6	21.5
100 L	1LA7 106 1LA7 107	2, 4, 6, 8 4, 8	102	12	16	372	438	120	423.5	28	M10	60	50	5	8	31	24	M8	50	40	5	8	27
112 M	1LA7 113	2, 4, 6, 8	102	12	16	393	461	120	444.5	28	M10	60	50	5	8	31	24	M8	50	40	5	8	27
132 S	1LA7 130 1LA7 131	2, 4, 6, 8 2	128	12	16	452.5 ²⁾	551.5	140	505 ²⁾	38	M12	80	70	5	10	41	38	M12	80	70	5	10	41
132 M	1LA7 133 1LA7 134	4, 6, 8 6	128	12	16	452.5 ²⁾	551.5	140	505 ²⁾	38	M12	80	70	5	10	41	38	M12	80	70	5	10	41
160 M	1LA7 163 1LA7 164	2, 4, 6, 8 2, 8	160.5	15	19	588	721	165	640.5	42	M16	110	90	10	12	45	42	M16	110	90	10	12	45
160 L	1LA7 166	2, 4, 6, 8	160.5	15	19	588	721	165	640.5	42	M16	110	90	10	12	45	42	M16	110	90	10	12	45
180 M	1LA5 183	2, 4	159	15	19	712	841	132	793.5	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5
180 L	1LA5 186	4, 6, 8	159	15	19	712	841	132	793.5	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5
200 L	1LA5 206 1LA5 207	2, 6 2, 4, 6, 8	178	19	25	769.5	897	192	850	55	M20	110	100	5	16	59	55	M20	110	100	5	16	59
225 S	1LA5 220	4, 8	184.5	19	25	806	933.5	192	887.5	60	M20	140	125	7.5	18	64	55	M20	110	100	5	16	59
225 M	1LA5 223	2 4, 6, 8	184.5	19	25	776 806	903.5 933.5	192	857.5 887.5	55 60	M20 M20	110 140	100 125	5 7.5	16 18	59 64	55	M20	110	100	5	16	59

¹⁾ The motors of frame size 56 M are not ventilated.

²⁾ In a low-noise version, the dimension L is 8 mm greater and the dimension LM is 11.5 mm greater.

³⁾ For 1LA7 063 with type of construction code 1 (B5, IM V1 without protective cover, IM V3) the dimensions L, LC and LM are 26 mm longer.

IEC Squirrel-Cage Motors

Standard motors up to frame size 315 L


Dimensions

Dimensional drawings

Aluminum series 1LA9, frame sizes 56 M to 200 L

Type of construction IM B35

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

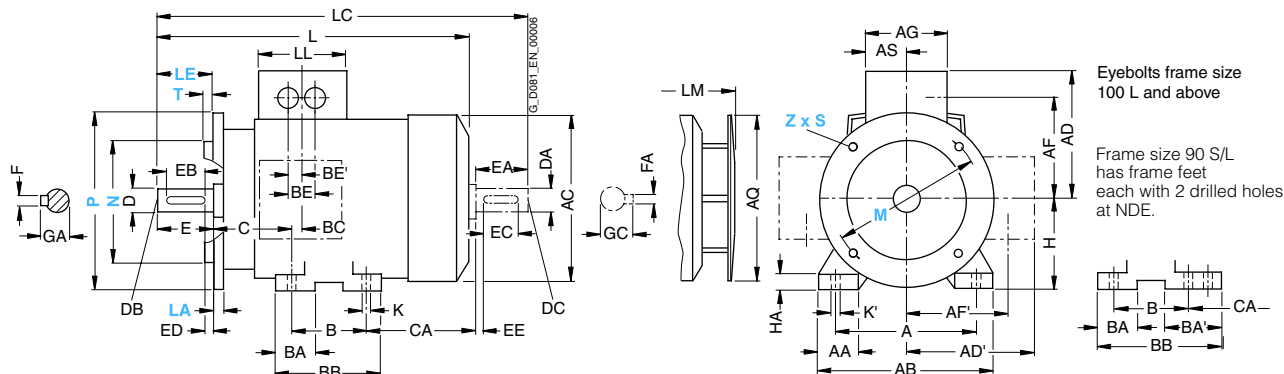


Eyebolts frame size
100 L and above

Frame size 90 S/L
has frame feet
each with 2 drilled holes
at NDE.

Type of construction IM B14

Type of construction IM B14 not possible for 1LA9 motors, frame sizes 180 M to 200 L

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

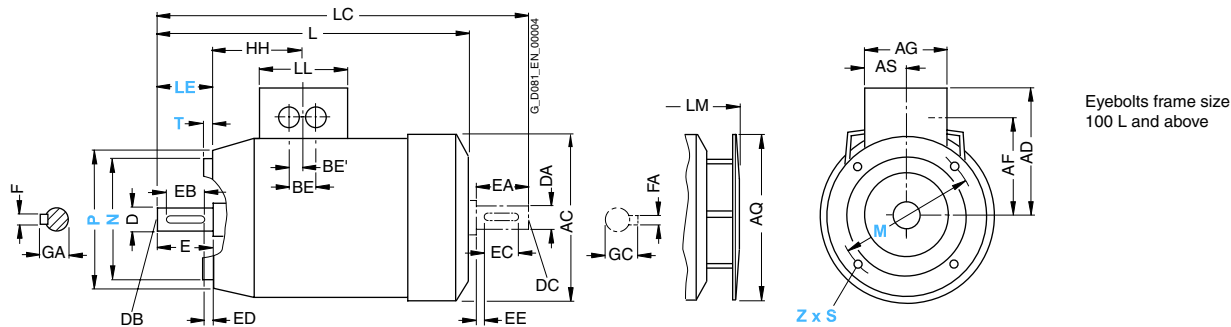

Eyebolts frame size
100 L and above

For motor		Number of poles	Dimension designation acc. to IEC								DE shaft extension						NDE shaft extension							
Frame size	Type		HH	K	K'	L	LC	LL	LM	D	DB	E	EB	ED	F	GA	DA	DC	EA	EC	EE	FA	GC	
56 M ¹⁾	1LA9 050 1LA9 053	2, 4	69.5	5.8	9	169 ²⁾ 195	200 ²⁾ 226	75	–	9	M3	20	14	3	3	10.2	9	M3	20	14	3	3	10.2	
63 M	1LA9 060 1LA9 063	2, 4	69.5	7	10	202.5 ³⁾ 228.5	232 ³⁾ 258	75	231.5 257.5	11	M4	23	16	3.5	4	12.5	11	M4	23	16	3.5	4	12.5	
71 M	1LA9 070 1LA9 073	2, 4	63.5	7	10	240	278	75	268	14	M5	30	22	4	5	16	14	M5	30	22	4	5	16	
80 M	1LA9 080 1LA9 083	2, 4	63.5	9.5	13.5	273.5 308.5	324 364	75	299.5 334.5	19	M6	40	32	4	6	21.5	19	M6	40	32	4	6	21.5	
90 S 90 L	1LA9 090 1LA9 096	2, 4, 6	79	10	14	331 376 ⁴⁾ 358 ⁵⁾	389 434 ⁴⁾ 414 ⁵⁾	75	382.5 427.5 ⁴⁾ 409.5 ⁵⁾	24	M8	50	40	5	8	27	19	M6	40	32	4	6	21.5	
100 L	1LA9 106 1LA9 107	2, 4, 6	102	12	16	407 442 ⁶⁾	473 508 ⁶⁾	120	458.5 493 ⁶⁾	28	M10	60	50	5	8	31	24	M8	50	40	5	8	27	
112 M	1LA9 113	2, 4, 6	102	12	16	431	499	120	482.5	28	M10	60	50	5	8	31	24	M8	50	40	5	8	27	
132 S	1LA9 130 1LA9 131	2, 4 2	128	12	16	452.5 490.5	551.5 589.5	140	505 543	38	M12	80	70	5	10	41	38	M12	80	70	5	10	41	
132 M	1LA9 133 1LA9 133 1LA9 134	6 4 6	128	12	16	452.5 490.5	551.5 589.5	140	505 543	38	M12	80	70	5	10	41	38	M12	80	70	5	10	41	
160 M	1LA9 163 1LA9 164	2, 4, 6 2	160.5	15	19	588	721	165	640.5	42	M16	110	90	10	12	45	42	M16	110	90	10	12	45	
160 L	1LA9 166	2, 4, 6	160.5	15	19	628	761	165	680.5	42	M16	110	90	10	12	45	42	M16	110	90	10	12	45	
180 M	1LA9 183	2, 4	159	15	19	712	841	132	793.5	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5	
180 L	1LA9 186	4, 6	159	15	19	712	841	132	793.5	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5	
200 L	1LA9 206 1LA9 207	2, 6 2, 4, 6	178	19	25	768.5	897	192	850	55	M20	110	100	5	16	59	55	M20	110	100	5	16	59	

¹⁾ The motors of frame size 56 M are not ventilated. Frame size 56 M is not available in IM B35.

²⁾ For 1LA9 frame size 56 M with type of construction code 1 (B5, IM V1 without protective cover, IM V3) the dimensions L and LC are 26 mm longer.

³⁾ For 1LA9 060 with type of construction code 1 (B5, IM V1 without protective cover, IM V3) the dimensions L, LC and LM are 26 mm longer.

⁴⁾ For 1LA9 096-6KA.

⁵⁾ For 1LA9 096-2 and 1LA9 096-4.

⁶⁾ For 1LA9 107-4KA.

IEC Squirrel-Cage Motors


Standard motors up to frame size 315 L

Dimensions

Dimensional drawings


Cast-iron series 1LA6, frame sizes 100 L to 160 L

Type of construction IM B3

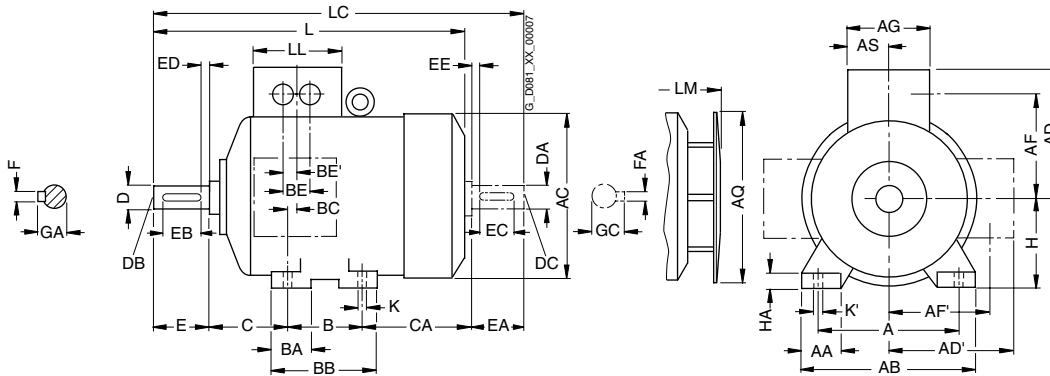

Types of construction IM B5 and IM V1

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

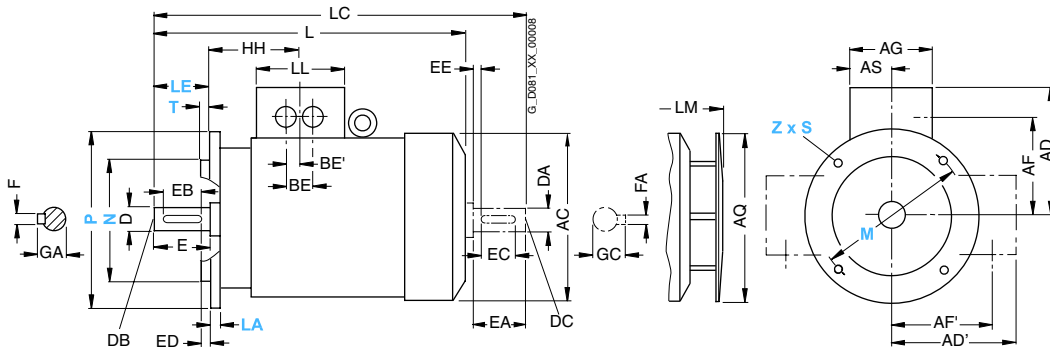

For motor			Dimension designation acc. to IEC																				
Frame size	Type	Number of poles	A	AA	AB	AC ¹⁾	AD	AD'	AF	AF'	AG	AQ	AS	B	BA	BB	BC	BE	BE'	C	CA	H	HA
100 L	1LA6 106 1LA6 107	2, 4, 6, 8 4, 8	160	40	196	201	164	164	124	124	121	170	60.5	140	46	180	42	44	22	63	125	100	12
112 M	1LA6 113	2, 4, 6, 8	190	42.5	226	225.5	178	178	138	138	121	170	60.5	140	46	180	34	44	22	70	141	112	15
132 S	1LA6 130 1LA6 131	2, 4, 6, 8 2	216	50	256	265	194	194	154	154	141	250	70.5	140	47	180	42	44	22	89	162.5	132	17
132 M	1LA6 133 1LA6 134	4, 6, 8 6	216	50	256	265	194	194	154	154	141	250	70.5	178	49	218	42	44	22	89	124.5	132	17
160 M	1LA6 163 1LA6 164	2, 4, 6, 8 2, 8	254	60	300	320	226	226	183	183	166	250	83	210	63	256	52	54	27	108	183	160	18
160 L	1LA6 166	2, 4, 6, 8	254	60	300	320	226	226	183	183	166	250	83	254	63	300	52	54	27	108	139	160	18

¹⁾ Measured across the bolt heads.

IEC Squirrel-Cage Motors

Standard motors up to frame size 315 L


Dimensions

Dimensional drawings

Cast-iron series 1LA6, frame sizes 100 L to 160 L


Type of construction IM B35

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

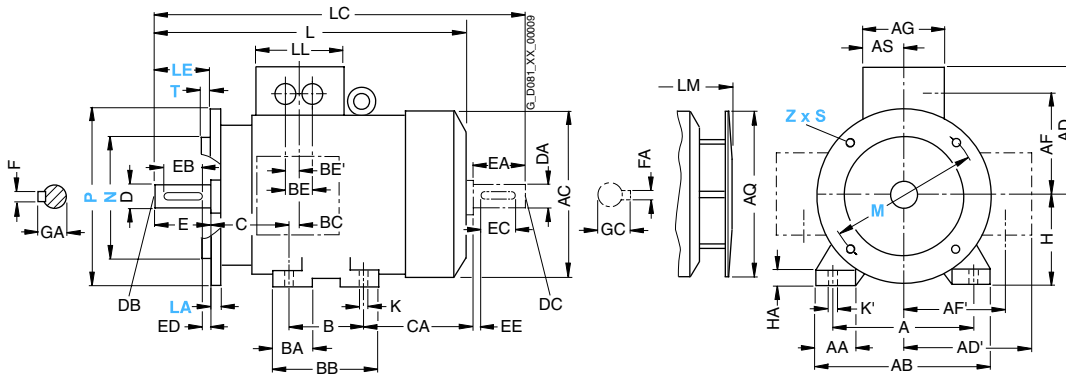

Types of construction IM B14

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

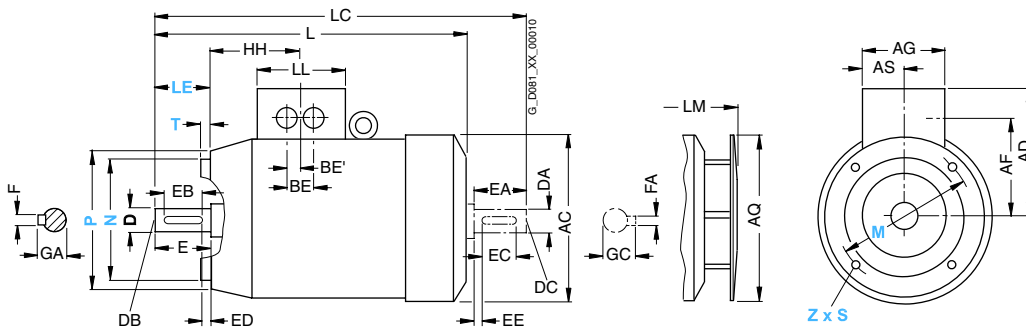

For motor			Dimension designation acc. to IEC							DE shaft extension							NDE shaft extension						
Frame size	Type	Number of poles	HH	K	K'	L	LC	LL	LM	D	DB	E	EB	ED	F	GA	DA	DC	EA	EC	EE	FA	GC
100 L	1LA6 106 1LA6 107	2, 4, 6, 8 4, 8	104.5	12	16	372	438	121	423.5	28	M10	60	50	5	8	31	24	M8	50	40	5	8	27
112 M	1LA6 113	2, 4, 6, 8	104.5	12	16	393	461	121	444.5	28	M10	60	50	5	8	31	24	M8	50	40	5	8	27
132 S	1LA6 130 1LA6 131	2, 4, 6, 8 2	130.5	12	16	453.5	551.5	141	506	38	M12	80	70	5	10	41	38	M12	80	70	5	10	41
132 M	1LA6 133 1LA6 134	4, 6, 8 6	130.5	12	16	453.5	551.5	141	506	38	M12	80	70	5	10	41	38	M12	80	70	5	10	41
160 M	1LA6 163 1LA6 164	2, 4, 6, 8 2, 8	160	14.5	18	588	721	166	640.5	42	M16	110	90	10	12	45	42	M16	110	90	10	12	45
160 L	1LA6 166	2, 4, 6, 8	160	14.5	18	588	721	166	640.5	42	M16	110	90	10	12	45	42	M16	110	90	10	12	45

IEC Squirrel-Cage Motors

Standard motors up to frame size 315 L


Dimensions

Dimensional drawings

Cast-iron series 1LG4, frame sizes 180 M to 315 L

Type of construction IM B35

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

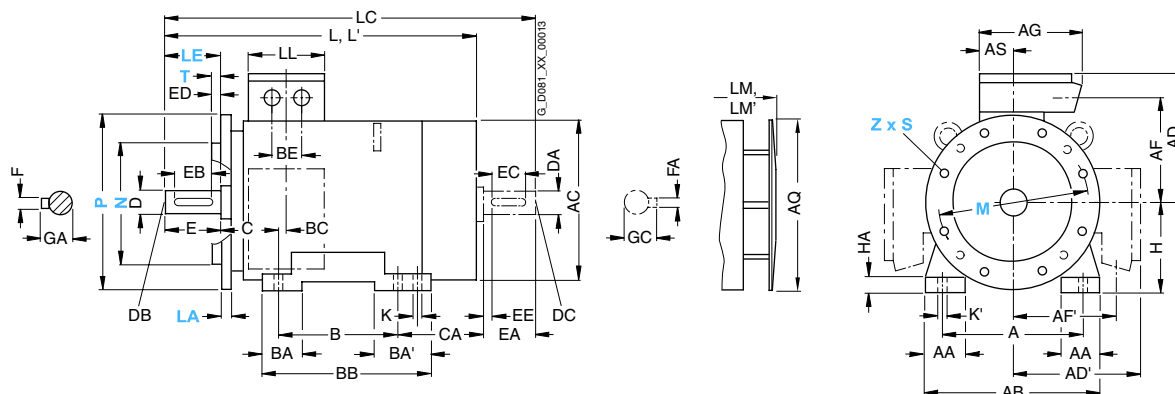

For motor			Dimension designation acc. to IEC										DE shaft extension							NDE shaft extension						
Frame size	Type	Number of poles	HH	K	K'	L	L ⁽¹⁾	LC ⁽²⁾	LL	LM	LM ⁽¹⁾	D	DB	E	EB	ED	F	GA	DA	DC	EA	EC	EE	FA	GC	
180 M	1LG4 183	2, 4	157	15	19	669	669	784	132	759	759	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5	
180 L	1LG4 186	4, 6, 8	157	15	19	669	—	784	132	759	—	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5	
	1LG4 188	2, 4, 6, 8	157	15	19	720	720	835	132	810	810	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5	
200 L	1LG4 206	2, 6	196	19	25	720	754	835	192	810	844	55	M20	110	100	5	16	59	55	M20	110	100	5	16	59	
	1LG4 207	2, 4, 6, 8	196	19	25	720	754	835	192	810	844	55	M20	110	100	5	16	59	55	M20	110	100	5	16	59	
	1LG4 208	2, 6	196	19	25	777	811	892	192	867	901	55	M20	110	100	5	16	59	55	M20	110	100	5	16	59	
		4, 8				720	—	835		810	—															
225 S	1LG4 220	4, 8	196	19	25	789	—	903	192	889	—	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59	
225 M	1LG4 223	2	196	19	25	759	793	873	192	859	893	55	M20	110	100	5	16	59	48	M16	110	100	5	14	51.5	
		4, 6, 8				789	—	903		889	—	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59	
	1LG4 228	2	196	19	25	819	853	933	192	919	953	55	M20	110	100	5	16	59	48	M16	110	100	5	14	51.5	
		4, 6, 8				849	—	963		949	—	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59	
250 M	1LG4 253	2	237	24	30	887	924	1002	236	987	1024	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59	
		4, 6, 8						1032				65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
	1LG4 258	2	237	24	30	887	924	1002	236	987	1024	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59	
		4				957	—	1102		1057	—	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
		6, 8				887	—	1032		987	—	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
280 S	1LG4 280	2	252	24	30	960	998	1105	236	1070	1108	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
		4, 6, 8					—				—	75	M20	140	125	10	20	79.5	65	M20	140	125	10	18	69	
280 M	1LG4 283	2	252	24	30	960	998	1105	236	1070	1108	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
		4, 6, 8									—	75	M20	140	125	10	20	79.5	65	M20	140	125	10	18	69	
	1LG4 288	2	252	24	30	1070	1108	1215	236	1180	1218	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
		4					—				—	75	M20	140	125	10	20	79.5	65	M20	140	125	10	18	69	
		6, 8				960	—	1105		1070	—	75	M20	140	125	10	20	79.5	65	M20	140	125	10	18	69	
315 S	1LG4 310	2	285	28	35	1072	1142	1217	307	1182	1252	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
	1LG4 310	4, 6, 8				1102	—	1247		1212	—	80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5	
315 M ³⁾	1LG4 313	2	285	28	35	1072	1142	1217	307	1182	1252	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
	1LG4 313	4, 6, 8				1102	—	1247		1212	—	80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5	
315 L ³⁾	1LG4 316/317	2	285	28	35	1232	1302	1377	307	1342	1412	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64	
	1LG4 316/317	4, 6, 8				1262	—	1407		1372	—	80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5	
	1LG4 318	8					—				—	80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5	
	1LG4 318	6	285	28	35	1402	—	1547	307	1512	—	80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5	

¹⁾ For version with low-noise fan for 2-pole motors.

²⁾ In the low-noise version, a second shaft extension and/or mounted encoder is not possible.

³⁾ With order codes for connection box positions (K09, K10, K11) only fitted feet with 3 drilled holes with dimension "B" (406, 457 and 508 mm). BB will then be 666 mm.

IEC Squirrel-Cage Motors


Standard motors up to frame size 315 L

Dimensions

Dimensional drawings


Cast-iron series 1LG6, frame sizes 180 M to 250 M

Type of construction IM B3

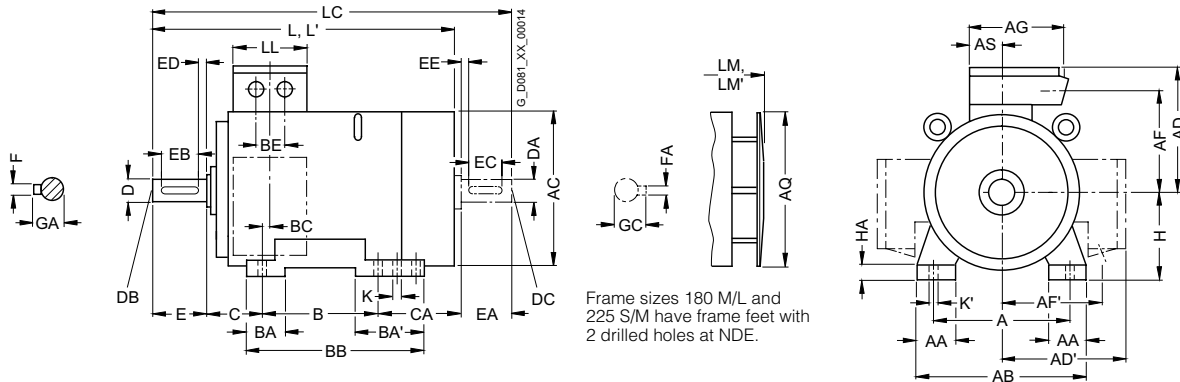

Types of construction IM B5 and IM V1

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

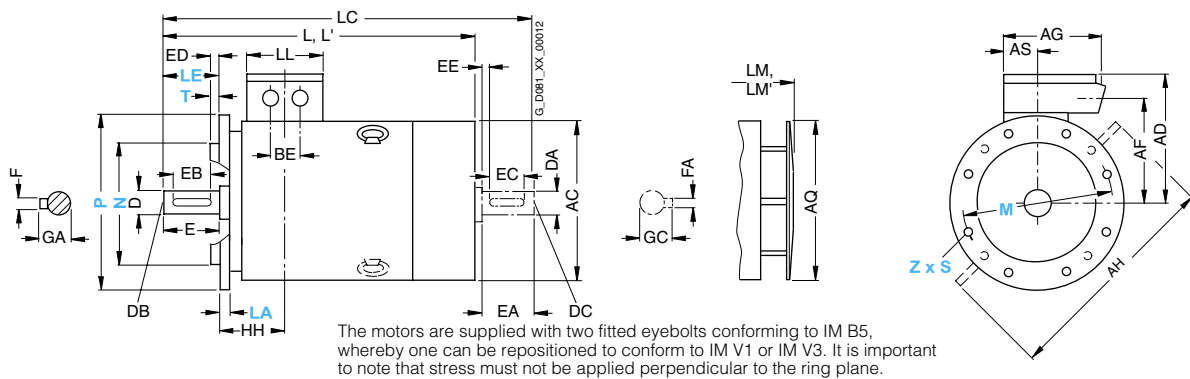

For motor			Dimension designation acc. to IEC																							
Frame size	Type	Number of poles	A	AA	AB	AC ¹⁾	AD	AD'	AF	AF'	AG	AH	AQ	AS	B*	BA	BA'	BB	BC	BE	C	CA*	H	HA		
180 M	1LG6 183	2	279	65	339	363	262	262	220	220	152	452	340	71	241	70	111	328	36	54	121	253	180	20		
180 L	1LG6 186	4	279	65	339	363	262	262	220	220	152	452	340	71	279	70	111	328	36	54	121	202	180	20		
		4, 6, 8																			215					
200 L	1LG6 206	2, 6	318	70	378	402	300	300	247	247	260	512	340	96	305	80	80	355	63	85	133	177	200	25		
	1LG6 207	2, 6	318	70	378	402	300	300	247	247	260	512	340	96	305	80	80	355	63	85	133	234	200	25		
		4, 8																			177					
225 S	1LG6 220	4, 8	356	80	436	442	325	325	272	272	260	556	425	96	286	85	110	361	47	85	149	218	225	34		
225 M	1LG6 223	2	356	80	436	442	325	325	272	272	260	556	425	96	311	85	110	361	47	85	149	253	225	34		
		4, 6, 8																								
	1LG6 228	2	356	80	436	442	325	325	272	272	260	556	425	96	311	85	110	361	47	85	149	303	225	34		
		4, 6																								
250 M	1LG6 253	2	406	100	490	495	392	392	308	308	300	620	470	118	349	100	100	409	69	110	168	235	250	40		
		4																			305					
		6, 8																			235					
	1LG6 258	2	406	100	490	495	392	392	308	308	300	620	470	118	349	100	100	409	69	110	168	305	250	40		
		4, 6																								

* This dimension is assigned in DIN EN 50347 to the frame size listed.

¹⁾ Measured across the bolt heads.

IEC Squirrel-Cage Motors

Standard motors up to frame size 315 L


Dimensions

Dimensional drawings

Cast-iron series 1LG6, frame sizes 180 M to 250 M

Type of construction IM B35

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

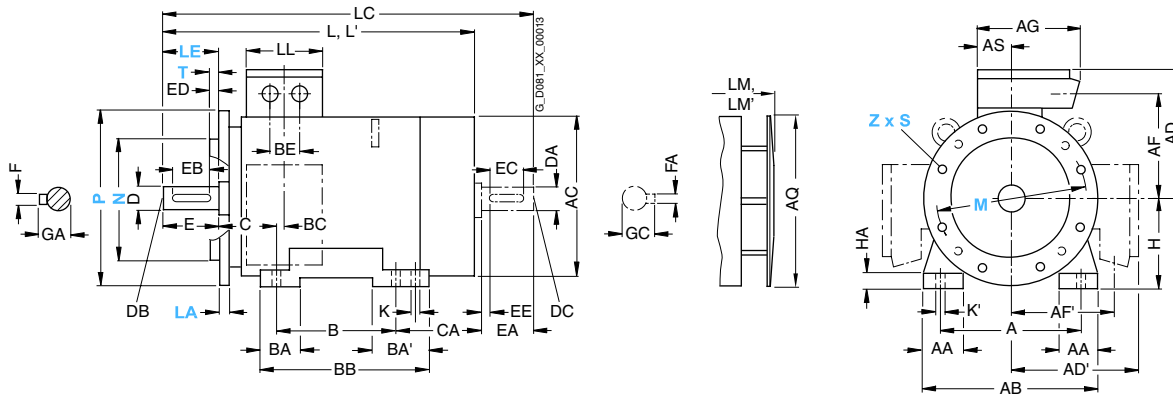

For motor			Dimension designation acc. to IEC							DE shaft extension						NDE shaft extension							
Frame size	Type	Number of poles	HH	K	K'	L	LC	LL	LM	D	DB	E	EB	ED	F	GA	DA	DC	EA	EC	EE	FA	GC
180 M	1LG6 183	2	157	15	19	720	835	132	810	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5
		4				669	784		759														
180 L	1LG6 186	4, 6, 8	157	15	19	720	835	132	810	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5
200 L	1LG6 206	2, 6	196	19	25	720	835	192	810	55	M20	110	100	5	16	59	55	M20	110	100	5	16	59
	1LG6 207	2, 6	196	19	25	777	892	192	867	55	M20	110	100	5	16	59	55	M20	110	100	5	16	59
		4, 8				720	835		810														
225 S	1LG6 220	4, 8	196	19	25	789	903	192	889	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59
225 M	1LG6 223	2	196	19	25	819	933	192	919	55	M20	110	100	5	16	59	48	M16	110	100	5	14	51.5
		4, 6, 8				849	963		949	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59
	1LG6 228	2	196	19	25	869	983	192	969	55	M20	110	100	5	16	59	48	M16	110	100	5	14	51.5
		4, 6				899	1013		999	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59
250 M	1LG6 253	2	237	24	30	887	1002	236	987	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59
		4				957	1102		1057	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
		6, 8				887	1032		987	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
	1LG6 258	2	237	24	30	957	1102	236	1057	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59
		4, 6								65	M20	140	125	10	18	69	60	M20	140	125	10	18	64

IEC Squirrel-Cage Motors


Standard motors up to frame size 315 L

Dimensions

Dimensional drawings


Cast-iron series 1LG6, frame sizes 280 S to 315 L

Type of construction IM B3

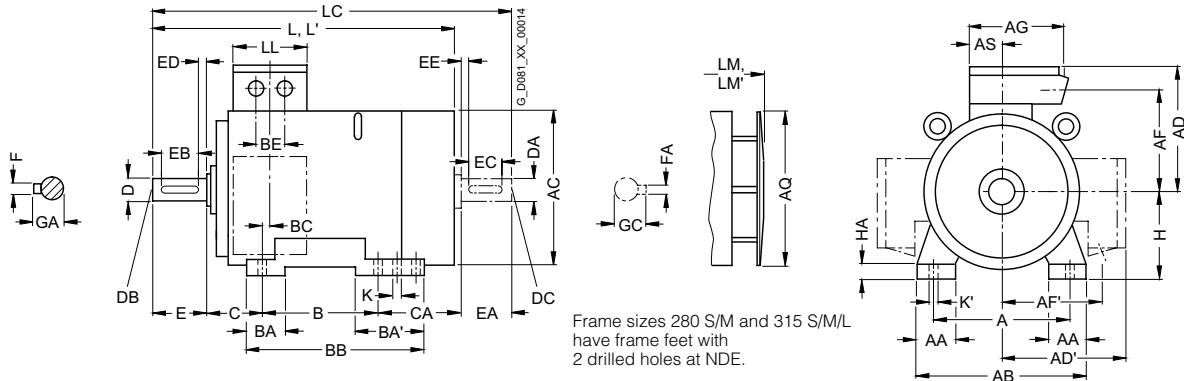

Types of construction IM B5 and IM V1

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

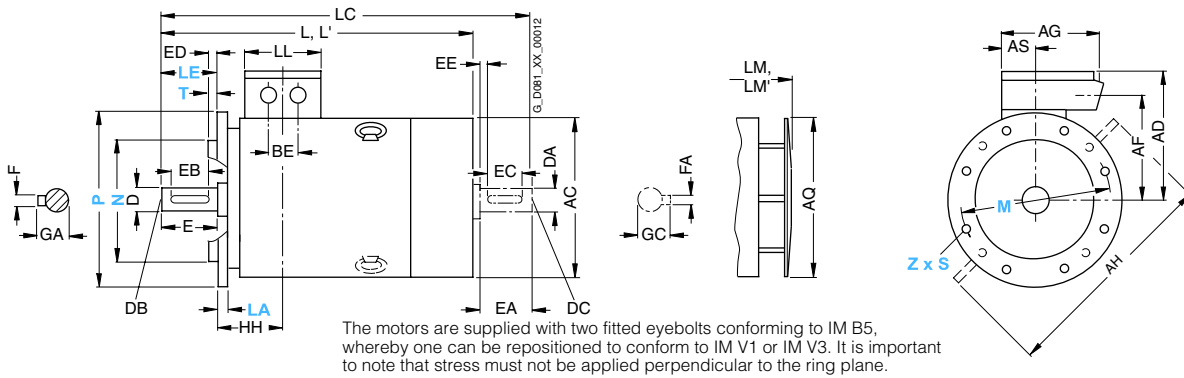

For motor			Dimension designation acc. to IEC																							
Frame size	Type	Number of poles	A	AA	AB	AC ¹⁾	AD	AD'	AF	AF'	AG	AH	AQ	AS	B*	BA	BA'	BB	BC	BE	C	CA*	H	HA		
280 S	1LG6 280	2	457	100	540	555	432	432	348	348	300	672	525	118	368	100	151	479	62	110	190	267	280	40		
280 M	1LG6 283	2	457	100	540	555	432	432	348	348	300	672	525	118	419	100	151	479	62	110	190	326	280	40		
		4																								
		6, 8																				216				
	1LG6 288	2	457	100	540	555	432	432	348	348	300	672	525	118	419	100	151	479	62	110	190	326	280	40		
		4, 6																								
315 S	1LG6 310	2	508	120	610	610	500	500	400	400	380	780	590	154	406	125	176	527	69	110	216	315	315	50		
315 M ²⁾	1LG6 310	4, 6, 8																								
	1LG6 313	8	508	120	610	610	500	500	400	400	380	780	590	154	457	125	176	527	69	110	216	264	315	50		
	1LG6 313	2	508	120	610	610	500	500	400	400	380	780	590	154	457	125	176	578	69	110	216	424	315	50		
315 L ²⁾	1LG6 313	4, 6																								
	1LG6 316	2	508	120	610	610	500	500	400	400	380	780	590	154	508	125	176	578	69	110	216	373	315	50		
	1LG6 316	4, 6																								
	1LG6 316	8																								
	1LG6 317	2	508	120	610	610	500	500	400	400	380	780	590	154	508	155	206	648	69	110	216	513	315	50		
	1LG6 317	4, 6																								
	1LG6 317	8																								
	1LG6 318	2	508	120	610	610	651	651	524	524	470	780	590	165	508	155	206	648	69	135	216	513	315	50		
	1LG6 318	4																								
1LG6 318	6, 8					500	500	400	400	380									110							

* This dimension is assigned in DIN EN 50347 to the frame size listed.

¹⁾ Measured across the bolt heads.


²⁾ With order codes for connection box positions (K09, K10, K11) only fitted feet with 3 drilled holes with dimension "B" (406, 457 and 508 mm). BB will then be 666 mm.

Dimensional drawings

Cast-iron series 1LG6, frame sizes 280 S to 315 L

Type of construction IM B35

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

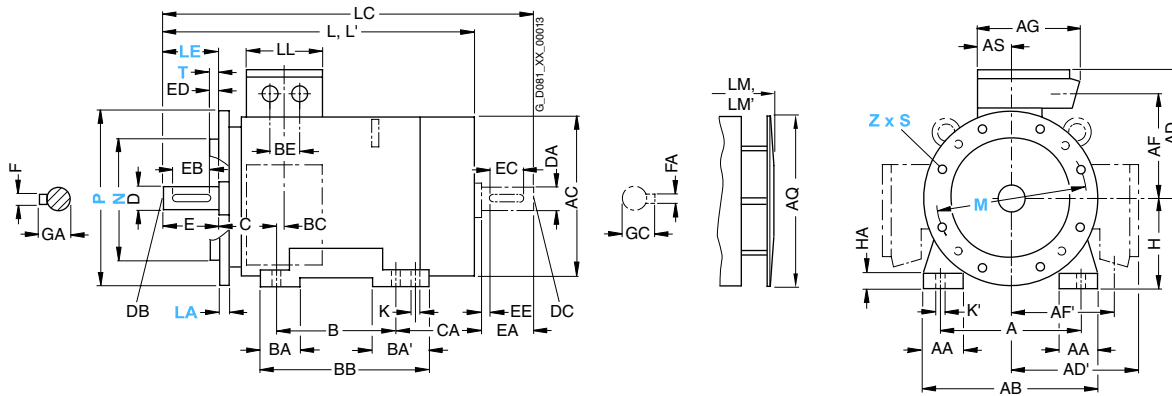

For motor			Dimension designation acc. to IEC							DE shaft extension							NDE shaft extension						
Frame size	Type	Number of poles	HH	K	K'	L	LC	LL	LM	D	DB	E	EB	ED	F	GA	DA	DC	EA	EC	EE	FA	GC
280 S	1LG6 280	2	252	24	30	960	1105	236	1070	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
280 M	1LG6 283	4, 6, 8	252	24	30	1070	1215	236	1180	75	M20	140	125	10	20	79.5	65	M20	140	125	10	18	69
		2								65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
	4									75	M20	140	125	10	20	79.5	65	M20	140	125	10	18	69
	6, 8				960	1105		1070	75	M20	140	125	10	20	79.5	65	M20	140	125	10	18	69	
	1LG6 288	2	252	24	30	1070	1215	236	1180	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
		4, 6								75	M20	140	125	10	20	79.5	65	M20	140	125	10	18	69
315 S	1LG6 310	2	285	28	35	1072	1217	307	1182	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
315 M	1LG6 310	4, 6, 8				1102	1247		1212	80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5
	1LG6 313	8	285	28	35	1102	1247	307	1212	80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5
	1LG6 313	2	285	28	35	1232	1377	307	1342	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
315 L	1LG6 313	4, 6				1262	1407		1372	80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5
	1LG6 316	2	285	28	35	1232	1377	307	1342	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
	1LG6 316	4, 6				1262	1407		1372	80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5
	1LG6 316	8								80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5
	1LG6 317	2	285	28	35	1372	1517	307	1482	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
	1LG6 317	4, 6				1402	1547		1512	80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5
	1LG6 317	8				1262	1407		1372	80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5
	1LG6 318	2	285	28	35	1372	1517	330	1482	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
	1LG6 318	4				1402	1547		1512	80 ¹⁾	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5
	1LG6 318	6, 8						307		80	M20	170	140	25	22	85	70	M20	140	125	10	20	74.5

1) Diameters up to 90 mm are possible.

IEC Squirrel-Cage Motors


Standard motors up to frame size 315 L

Dimensions

Dimensional drawings


Aluminum series 1LP7 and 1LP5, frame sizes 63 M to 200 L

Type of construction IM B3

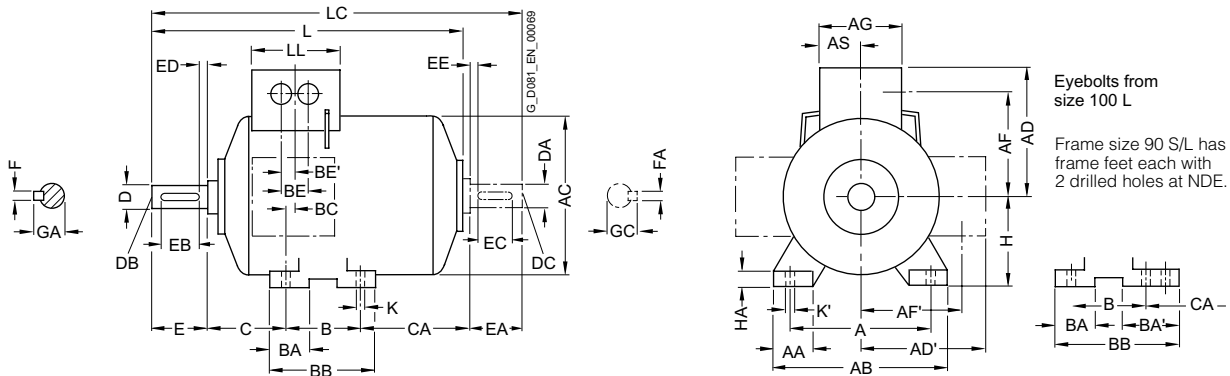

Types of construction IM B5 and IM V1

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

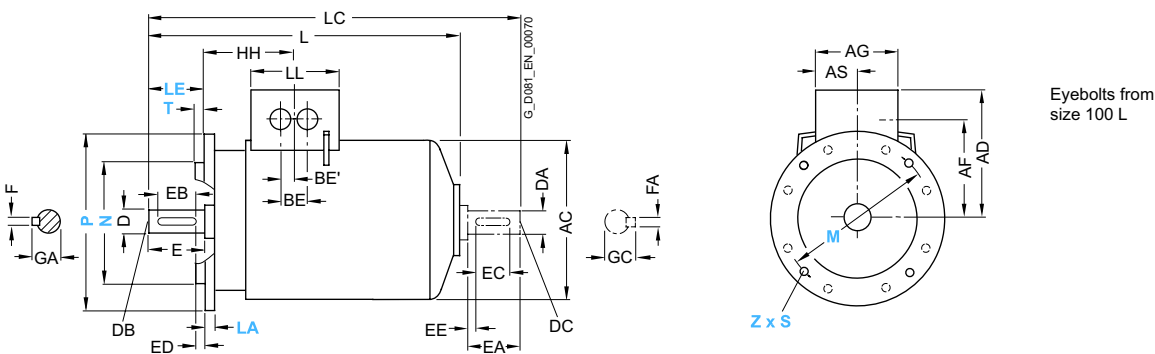

For motor			Dimension designation acc. to IEC																				
Frame size	Type	Number of poles	A	AA	AB	AC	AD	AD'	AF	AF'	AG	AS	B*	BA	BA'	BB	BC	BE	BE'	C	CA*	H	HA
63 M	1LP7 060 1LP7 063	2, 4, 6	100	27	120	124	101	101	78	78	75	37.5	80	28	–	96	30	32	18	40	40	63	7
71 M	1LP7 070 1LP7 073	2, 4, 6, 8	112	27	132	145	111	111	88	88	75	37.5	90	27	–	106	18	32	18	45	42	71	7
80 M	1LP7 080 1LP7 083	2, 4, 6, 8	125	30.5	150	163	120	120	97	97	75	37.5	100	32	–	118	14	32	18	50	47	80	8
90 S 90 L	1LP7 090 1LP7 096	2, 4, 6, 8	140	30.5	165	180	128	128	105	105	75	37.5	100 125	33	54	143	23	32	18	56	80 55	90	10
100 L	1LP7 106 1LP7 107	2, 4, 6, 8 4, 8	160	42	196	203	135	163	78	123	120	60	140	47	–	176	39	42	21	63	68	100	12
112 M	1LP7 113	2, 4, 6, 8	190	46	226	227	148	176	91	136	120	60	140	47	–	176	32	42	21	70	79	112	12
132 S	1LP7 130 1LP7 131	2, 4, 6, 8 2	216	53	256	267	167	194	107	154	140	70	140	49	–	180	39	42	21	89	96	132	15
132 M	1LP7 133 1LP7 134	4, 6, 8 6	216	53	256	267	167	194	107	154	140	70	178	49	–	218	39	42	21	89	58	132	15
160 M	1LP7 163 1LP7 164	2, 4, 6, 8 2, 8	254	60	300	320	197	226	127	183	165	82.5	210	57	–	256	52.5	54	27	108	107	160	18
160 L	1LP7 166	2, 4, 6, 8	254	60	300	320	197	226	127	183	165	82.5	254	57	–	300	52.5	54	27	108	63	160	18
180 M	1LP5 183	2, 4	279	69.5	339	363	258	258	216	216	152	71	241	50	–	287	38	54	27	121	145	180	18
180 L	1LP5 186	4, 6, 8	279	69.5	339	363	258	258	216	216	152	71	279	50	–	325	38	54	27	121	107	180	18
200 L	1LP5 206 1LP5 207	2, 6 2, 4, 6, 8	318	83	388	402	305	305	252	252	260	96	305	58.5	–	355	45	85	42.5	133	133	200	24

* This dimension is assigned in DIN EN 50347 to the frame size listed.

IEC Squirrel-Cage Motors

Standard motors up to frame size 315 L


Dimensions

Dimensional drawings

Aluminum series 1LP7 and 1LP5, frame sizes 63 M to 200 L

Types of construction IM B35


For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

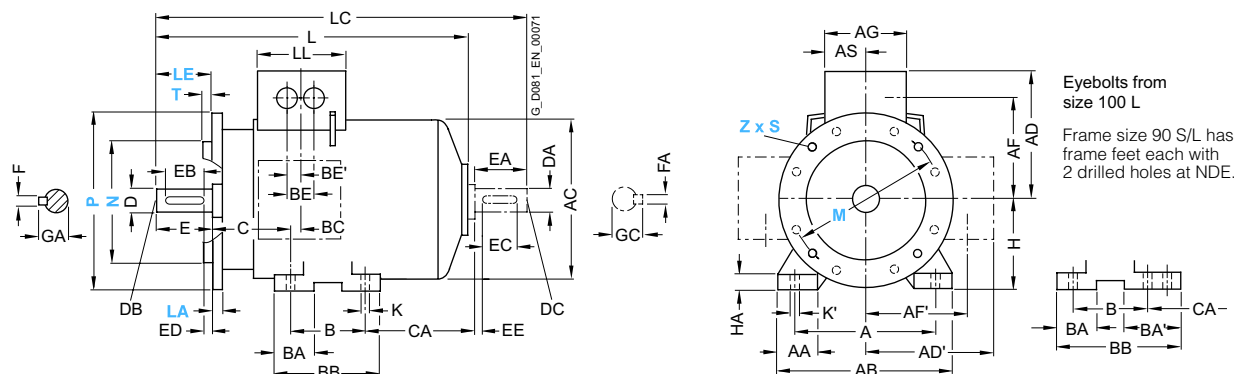

Type of construction IM B14

Type of construction IM B14 not possible for 1LP5 motors, frame sizes 180 M to 200 L

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

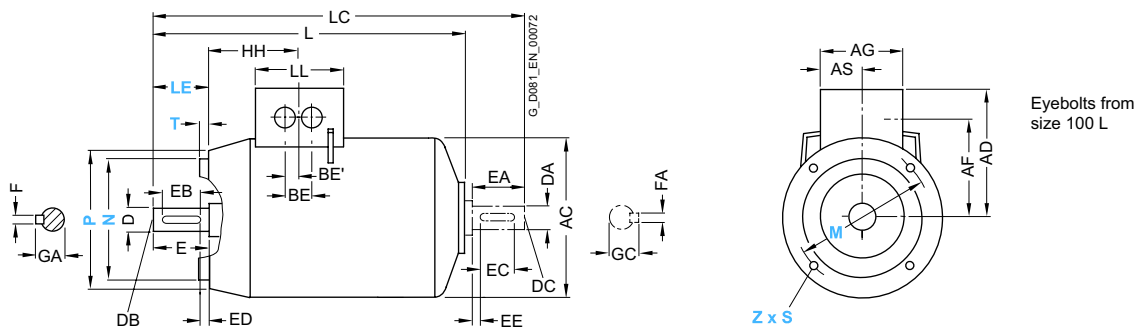

For motor	Frame size	Type	Number of poles	Dimension designation acc. to IEC					DE shaft extension					NDE shaft extension									
				HH	K	K'	L	LC	LL	D	DB	E	EB	ED	F	GA	DA	DC	EA	EC	EE	FA	GC
	63 M	1LP7 060 1LP7 063	2, 4, 6	69.5	7	10	172 ¹⁾	206 ¹⁾	75	11	M4	23	16	3.5	4	12.5	11	M4	23	16	3.5	4	12.5
	71 M	1LP7 070 1LP7 073	2, 4, 6, 8	63.5	7	10	207	240	75	14	M5	30	22	4	5	16	14	M5	30	22	4	5	16
	80 M	1LP7 080 1LP7 083	2, 4, 6, 8	63.5	9.5	13.5	237	280	75	19	M6	40	32	4	6	21.5	19	M6	40	32	4	6	21.5
	90 S 90 L	1LP7 090 1LP7 096	2, 4, 6, 8	79	10	14	286 286	333 333	75	24	M8	50	40	5	8	27	19	M6	40	32	4	6	21.5
	100 L	1LP7 106 1LP7 107	2, 4, 6, 8 4, 8	102	12	16	331	385 ²⁾	120	28	M10	60	50	5	8	31	24	M8	50	40	5	8	27
	112 M	1LP7 113	2, 4, 6, 8	102	12	16	349 ³⁾	403 ⁴⁾	120	28	M10	60	50	5	8	31	24	M8	50	40	5	8	27
	132 S	1LP7 130 1LP7 131	2, 4, 6, 8 2	128	12	16	397	485	140	38	M12	80	70	5	10	41	38	M12	80	70	5	10	41
	132 M	1LP7 133 1LP7 134	4, 6, 8 6	128	12	16	397	485	140	38	M12	80	70	5	10	41	38	M12	80	70	5	10	41
	160 M	1LP7 163 1LP7 164	2, 4, 6, 8 2, 8	160.5	15	19	529	645	165	42	M16	110	90	10	12	45	42	M16	110	90	10	12	45
	160 L	1LP7 166	2, 4, 6, 8	160.5	15	19	529	645	165	42	M16	110	90	10	12	45	42	M16	110	90	10	12	45
	180 M	1LP5 183	2, 4	159	15	19	611	727	132	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5
	180 L	1LP5 186	4, 6, 8	159	15	19	611	727	132	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5
	200 L	1LP5 206 1LP5 207	2, 6 2, 4, 6, 8	178	19	25	675	791	192	55	M20	110	100	5	16	59	55	M20	110	100	5	16	59

¹⁾ For 1LP7 063 with type of construction code 1 (B5, IM V1 without protective cover, IM V3) the dimensions L and LC are 26 mm longer.

²⁾ For IM B14, 381 mm.

³⁾ For IM B5, 345 mm.

⁴⁾ For IM B5, 399 mm.

IEC Squirrel-Cage Motors


Standard motors up to frame size 315 L

Dimensions

Dimensional drawings

Cast-iron series 1LP4, frame sizes 180 M to 315 L


Type of construction IM B3

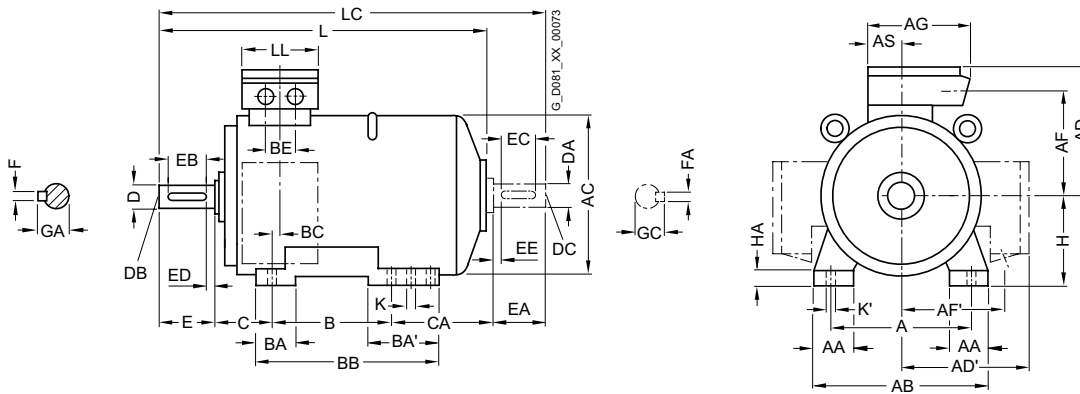

Frame sizes 180 M/L, 225 S/M, 280 S/M and 315 S/M/L have frame feet each with 2 drilled holes at NDE.

Types of construction IM B5 and IM V1 (IM B5 only up to frame size 315 M)

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

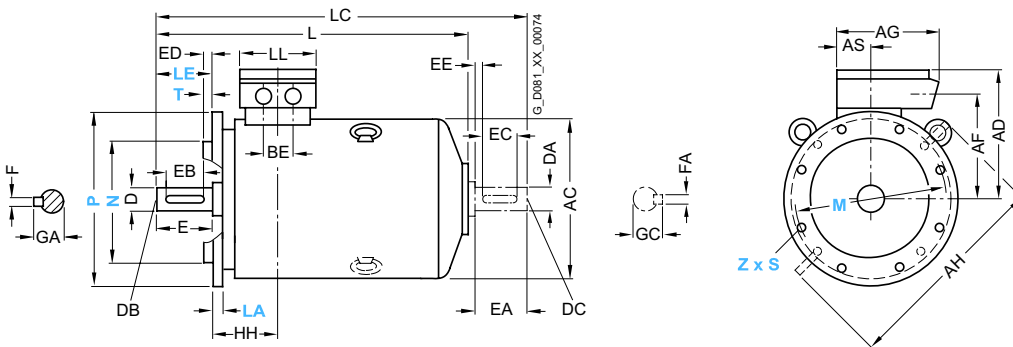

The motors are supplied with two fitted eyebolts conforming to IM B5, whereby one can be repositioned to conform to IM V1 or IM V3. It is important to note that stress must not be applied perpendicular to the ring plane.

For motor			Dimension designation acc. to IEC																							
Frame size	Type	Number of poles	A	AA	AB	AC	AD	AD'	AF	AF'	AG	AH	AS	B*	BA	BA'	BB	BC	BE	C	CA*	H	HA			
180 M	1LP4 183	2, 4	279	65	339	363	262	262	220	220	152	452	71	241	70	111	328	36	54	121	94	180	20			
180 L	1LP4 186	4, 6, 8	279	65	339	363	262	262	220	220	152	452	71	279	70	111	328	36	54	121	56	180	20			
200 L	1LP4 206	2, 6	318	70	378	402	300	300	247	247	260	512	96	305	80	80	355	63	85	133	76	200	25			
	1LP4 207	2, 4, 6, 8	318	70	378	402	300	300	247	247	260	512	96	305	80	80	355	63	85	133	76	200	25			
225 S	1LP4 220	4, 8	356	80	436	442	325	325	272	272	260	556	96	286	85	110	361	47	85	149	99	225	34			
225 M	1LP4 223	2	356	80	436	442	325	325	272	272	260	556	96	311	85	110	361	47	85	149	74	225	34			
		4, 6, 8																								
250 M	1LP4 253	2	406	100	490	495	392	392	308	308	300	620	118	349	100	100	409	69	110	168	111	250	40			
		4, 6, 8																								
280 S	1LP4 280	2	457	100	540	555	432	432	348	348	300	672	118	368	100	151	479	62	110	190	137	280	40			
		4, 6, 8																								
280 M	1LP4 283	2	457	100	540	555	432	432	348	348	300	672	118	414	100	151	479	62	110	190	86	280	40			
		4, 6, 8																								
315 S	1LP4 310	2	508	120	610	610	500	500	400	400	380	780	154	406	125	176	527	69	110	216	168	315	50			
	1LP4 310	4, 6, 8																								
315 M ¹⁾	1LP4 313	2	508	120	610	610	500	500	400	400	380	780	154	457	125	176	527	69	110	216	117	315	50			
	1LP4 313	4, 6, 8																								
315 L ¹⁾	1LP4 316/317	2	508	120	610	610	500	500	400	400	380	780	154	508	125	176	578	69	110	216	226	315	50			
	1LP4 316/317	4, 6, 8																								

* This dimension is assigned in DIN EN 50347 to the frame size listed.

¹⁾ With order codes for connection box positions (K09, K10, K11) only fitted feet with 3 drilled holes with dimension "B" (406, 457 and 508 mm). BB will then be 666 mm.

IEC Squirrel-Cage Motors

Standard motors up to frame size 315 L


Dimensions

Dimensional drawings

Cast-iron series 1LP4, frame sizes 180 M to 315 L

Type of construction IM B35

For flange dimensions, see Page 2/140 (Z = the number of retaining holes)

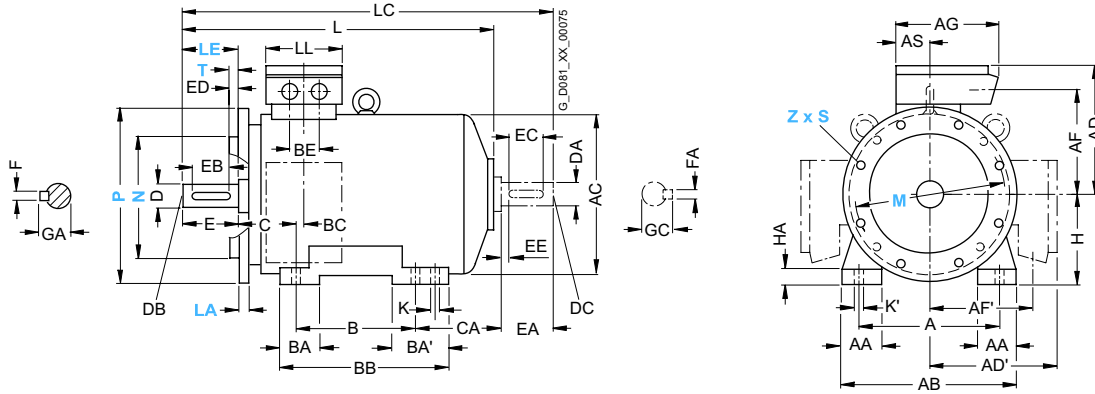

For motor			Dimension designation acc. to IEC						DE shaft extension						NDE shaft extension							
Frame size	Type	Number of poles	HH	K	K'	L	LC	LL	D	DB	E	EB	ED	F	GA	DA	DC	EA	EC	EE	FA	GC
180 M	1LP4 183	2, 4	157	15	19	562	676	132	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5
180 L	1LP4 186	4, 6, 8	157	15	19	562	676	132	48	M16	110	100	5	14	51.5	48	M16	110	100	5	14	51.5
200 L	1LP4 206	2, 6	196	19	25	617	734	192	55	M20	110	100	5	16	59	55	M20	110	100	5	16	59
	1LP4 207	2, 4, 6, 8	196	19	25	617	734	192	55	M20	110	100	5	16	59	55	M20	110	100	5	16	59
225 S	1LP4 220	4, 8	196	19	25	670	784	192	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59
225 M	1LP4 223	2	196	19	25	640	754	192	55	M20	110	100	5	16	59	48	M16	110	100	5	14	51.5
		4, 6, 8				670	784		60	M20	140	125	10	18	64	55	M20	110	100	5	16	59
250 M	1LP4 253	2	237	24	30	764	878	236	60	M20	140	125	10	18	64	55	M20	110	100	5	16	59
		908					65		M20						140							
280 S	1LP4 280	2	252	24	30	830	975	236	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
		75							M20						140							
280 M	1LP4 283	2	252	24	30	830	975	236	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
		75							M20						140							
315 S	1LP4 310	2	285	28	35	925	1070	307	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
		80							M20						170							
315 M ¹⁾	1LP4 313	2	285	28	35	925	1070	307	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
		80							M20						170							
315 L ¹⁾	1LP4 316/317	2	285	28	35	1085	1230	307	65	M20	140	125	10	18	69	60	M20	140	125	10	18	64
		80							M20						170							

¹⁾ With order codes for connection box positions (K09, K10, K11) only fitted feet with 3 drilled holes with dimension "B" (406, 457 and 508 mm). BB will then be 666 mm.


IEC Squirrel-Cage Motors

Standard motors up to frame size 315 L

Dimensions

Dimensional drawings

Flange dimensions

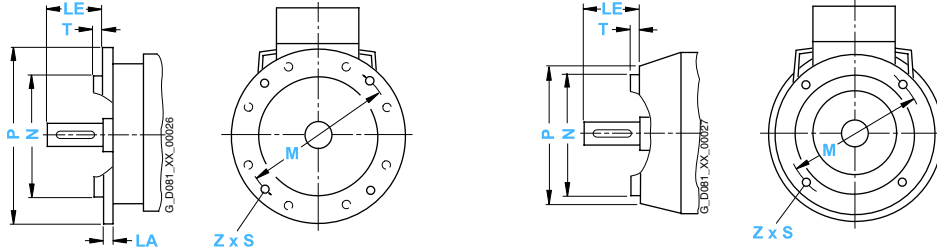

In DIN EN 50347, the frame sizes are allocated flange FF with through holes and flange FT with tapped holes. The designation of flange A and C according to DIN 42948 (invalid since 09/2003) are also listed for information purposes. See the table below. (Z = the number of retaining holes)

Frame size	Type of construction	Flange type	Flange with through holes (FF/A) Tapped holes (FT/C)		Dimension designation acc. to IEC								
			Acc. to DIN EN 50347	Acc. to DIN 42948	LA	LE	M	N	P	S	T	Z	
56 M	IM B5, IM B35, IM V1, IM V3	Flange	FF 100	A 120	8	20	100	80	120	7	3	4	
	IM B14, IM B34, IM V18, IM V19	Standard flange	FT 65	C 80	–	20	65	50	80	M5	2.5	4	
	IM B14, IM B34, IM V18, IM V19	Special flange	FT 85	C 105	–	20	85	70	105	M6	2.5	4	
63 M	IM B5, IM B35, IM V1, IM V3	Flange	FF 115	A 140	8	23	115	95	140	10	3	4	
	IM B14, IM B34, IM V18, IM V19	Standard flange	FT 75	C 90	–	23	75	60	90	M5	2.5	4	
	IM B14, IM B34, IM V18, IM V19	Special flange	FT 100	C 120	–	23	100	80	120	M6	3	4	
71 M	IM B5, IM B35, IM V1, IM V3	Flange	FF 130	A 160	9	30	130	110	160	10	3.5	4	
	IM B14, IM B34, IM V18, IM V19	Standard flange	FT 85	C 105	–	30	85	70	105	M6	2.5	4	
	IM B14, IM B34, IM V18, IM V19	Special flange	FT 115	C 140	–	30	115	95	140	M8	3	4	
80 M	IM B5, IM B35, IM V1, IM V3	Flange	FF 165	A 200	10	40	165	130	200	12	3.5	4	
	IM B14, IM B34, IM V18, IM V19	Standard flange	FT 100	C 120	–	40	100	80	120	M6	3	4	
	IM B14, IM B34, IM V18, IM V19	Special flange	FT 130	C 160	–	40	130	110	160	M8	3.5	4	
90 S, 90 L	IM B5, IM B35, IM V1, IM V3	Flange	FF 165	A 200	10	50	165	130	200	12	3.5	4	
	IM B14, IM B34, IM V18, IM V19	Standard flange	FT 115	C 140	–	50	115	95	140	M8	3	4	
	IM B14, IM B34, IM V18, IM V19	Special flange	FT 130	C 160	–	50	130	110	160	M8	3.5	4	
100 L	IM B5, IM B35, IM V1, IM V3	Flange	FF 215	A 250	11	60	215	180	250	14.5	4	4	
	IM B14, IM B34, IM V18, IM V19	Standard flange	FT 130	C 160	–	60	130	110	160	M8	3.5	4	
	IM B14, IM B34, IM V18, IM V19	Special flange	FT 165	C 200	–	60	165	130	200	M10	3.5	4	
112 M	IM B5, IM B35, IM V1, IM V3	Flange	FF 215	A 250	11	60	215	180	250	14.5	4	4	
	IM B14, IM B34, IM V18, IM V19	Standard flange	FT 130	C 160	–	60	130	110	160	M8	3.5	4	
	IM B14, IM B34, IM V18, IM V19	Special flange	FT 165	C 200	–	60	165	130	200	M10	3.5	4	
132 S, 132 M	IM B5, IM B35, IM V1, IM V3	Flange	FF 265	A 300	12	80	265	230	300	14.5	4	4	
	IM B14, IM B34, IM V18, IM V19	Standard flange	FT 165	C 200	–	80	165	130	200	M10	3.5	4	
	IM B14, IM B34, IM V18, IM V19	Special flange	FT 215	C 250	–	80	215	180	250	M12	4	4	
160 M, 160 L	IM B5, IM B35, IM V1, IM V3	Flange	FF 300	A 350	13	110	300	250	350	18.5	5	4	
	IM B14, IM B34, IM V18, IM V19	Standard flange	FT 215	C 250	–	110	215	180	250	M12	4	4	
	IM B14, IM B34, IM V18, IM V19	Special flange	FT 265	C 300	–	110	265	230	300	M12	4	4	
180 M, 180 L	IM B5, IM V1, IM V3	Flange	FF 300	A 350	13	110	300	250	350	18.5	5	4	
200 L	IM B5	Flange	FF 350	A 400	15	110	350	300	400	18.5	5	4	
225 S, 225 M 2-pole 4-pole to 8-pole	IM B5, IM V1, IM V3	Flange	FF 400	A 450	16	110 140	400	350	450	18.5	5	8	
250 M	IM B5, IM V1, IM V3	Flange	FF 500	A 550	18	140	500	450	550	18.5	5	8	
280 S, 280 M	IM B5, IM V1, IM V3	Flange	FF 500	A 550	18	140	500	450	550	18.5	5	8	
315 S, 315 M, 315 L 2-pole 4-pole to 8-pole	IM B5, IM V1, IM V3	Flange	FF 600	A 660	22	140 170	600	550	660	24	6	8	